



Chroma's 63600 Series DC Electronic Loads are designed for testing multi-output AC/DC power supplies, DC/DC converters, chargers, batteries, adapters, and power electronic components. They are excellent for research, development, production, and incoming inspection applications.

KEY FEATURES

- Max. Power : 100W x 2(Dual), 300W & 400W
- Voltage Range : up to 600V
- 5 module mainframe Max. 2000W, load modules up to 400W/ea
- Up to 10 channels in one mainframe, fit for testing multiple output SMPS
- 0.4V @ 80A (Typical) low voltage operating characteristics
- Flexible CC, CR, CV and CP operation modes
- CZ mode for turn on capacitive load simulation
- Parallel mode for high current and power application up to 2kW
- User defined waveform
- Multi Channel synchronous control
- Auto frequency sweep up to 50kHz
- Real time power supply load transient response simulation and Vpk+/- measurement
- User programmable 100 sequential front panel input status for user-friendly operating
- Precision voltage and current measurement
- Precision high speed digitizing measurement/ data capture
- Voltage, Current and Pmax measurement for OCP/OLP testing
- Timing measurement for batteries
- Short circuit simulation
- Self-test at power-on
- Full Protection : OC, OP, OT protection and OV alarm
- Ethernet, USB and GPIB interfaces

The 63600's state of the art design uses DSP technology to simulate non-linear loads using an unique CZ operation mode allowing realistic loading behavior.

The 63600 series can draw its rated current under very low voltage (0.4V typical). This unique feature guarantees the best loading performance for modern Point-of-Load conditions and fuel cells.

The 63600 series can simulate a wide range of dynamic loading applications, with programmable load levels, slew rates, duration, and conducting voltage. The 63600 also has a dynamic sweep function to meet the test requirements of ATX power supplies. The instrument allows up to 100 sets of system operating status which can be stored in the EEPROM and recalled instantly for automated testing application.


Real time measurement of voltage and current are integrated into each 63600 load module using a 16-bit measurement circuit with three current ranges. The user can perform online voltage measurements and adjustments or simulate short circuit test using the simple keypad on the front panel.

With the VFD display and rotary knob, the 63600 loads offer versatile front panel operation. Users are able to control the 63600 family remotely via Ethernet, USB, or GPIB interface.

Also included in the 63600 are self-diagnostic routines and full protections against OP, OC, OT and alarm indicating OV, reverse polarity. This ensures the quality and reliability of the 63600 and provides protection of units under test.

ORDERING INFORMATION

- 63600-1** : 63600 Mainframe for Single Module
- 63600-2** : 63600 Mainframe for 2 Modules
- 63600-5** : 63600 Mainframe for 5 Modules (Max. 10 channels)
- 63601-5** : 63600 Mainframe for 5 Modules (Only one slot for dual channel load module, Max. 6 channels)
- 63610-80-20** : DC Load Module, 80V/20A/100Wx2
- 63630-80-60** : DC Load Module, 80V/60A/300W
- 63630-600-15** : DC Load Module, 600V/15A/300W
- 63640-80-80** : DC Load Module, 80V/80A/400W
- 63640-150-60** : DC Load Module, 150V/60A/400W
- A636000** : GPIB Interface for 63600-2/63600-5/63601-5 Mainframe
- A636001** : Ethernet Interface for 63600-2/63600-5 Mainframe
- A636003** : External Signal Board (Test Pin) for 63600-2/63600-5 Mainframe
- A636005** : External Signal Board (BNC) for 63600-2/63600-5 Mainframe
- A636007** : Rack Mounting Kit for 63600-2 mainframe
- A636008** : Rack Mounting Kit for 63600-5/63601-5 mainframe (for Europe only)
- A632006** : NI USB-6211 Bus-Powered Multifunction DAQ

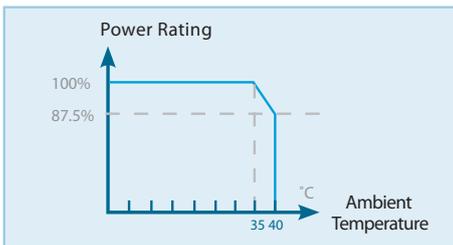

Model 63600-2



Model 63600-5

Model	63600-1*	63600-2	63600-5	63601-5
Number of slots	1 slot	2 slots	5 slots	5 slots
Operating temperature	0~40°C	0~40°C	0~40°C	0~40°C
Input Rating	1Ø 100~115V ± 10% V _{LN} , 1Ø 190~230V ± 10% V _{LN} , Switchable, 47~63Hz	1Ø 100~115V ± 10% V _{LN} , 1Ø 190~230V ± 10% V _{LN} , Switchable, 47~63Hz	1Ø 100~115V ± 10% V _{LN} , 1Ø 190~230V ± 10% V _{LN} , Auto Range, 47~63Hz	1Ø 100~115V ± 10% V _{LN} , 1Ø 190~230V ± 10% V _{LN} , Auto Range, 47~63Hz
Mainframe dimension (HxWxD)	177x70.22x554.9mm / 7x2.76x21.8 inch	177x210x554mm / 7.0x8.27x21.8 inch	177x447x554mm / 7.0x17.6x21.8 inch (Full Rack)	177x447x554mm / 7.0x17.6x21.8 inch (Full Rack)
Weight	7.5kg / 16.53lbs	11.5kg / 23.35lbs	15.6kg / 34.39lbs	15.6kg / 34.39lbs

* None digital interface option

SPECIFICATIONS-1						
Model	63610-80-20			63630-80-60		
Configuration	100Wx2			300W		
Voltage *1 *8	0~80V			0~80V		
Current	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Power *2	0~16W	0~30W	0~100W	0~30W	0~60W	0~300W
Static Mode						
Typical Min. Operating Voltage (DC)	0.5V@0.2A	0.5V@2A	0.5V@20A	0.5V@0.6A	0.5V@6A	0.5V@60A
Constant Current Mode						
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Resolution	0.01mA	0.1mA	1mA	0.01mA	0.1mA	1mA
Accuracy	0.1%+0.1%F.S.			0.1%+0.1%F.S.		
Constant Resistance Mode						
Range	CRL : 0.04~80 Ω (100W/6V) CRM: 1.44~2.9k Ω (100W/16V) CRH : 5.76~12k Ω (100W/80V)			CRL : 0.015~30 Ω (300W/6V) CRM: 0.3~600 Ω (300W/16V) CRH : 1.5~3k Ω (300W80V)		
Resolution *9	0.3288mS			0.9864mS		
Accuracy *3	0.1%+0.075S (6V) 0.1%+0.01S (16V) 0.1%+0.00375S (80V)			0.1%+0.2S (6V) 0.1%+0.03S (16V) 0.1%+0.01S (80V)		
Constant Voltage Mode						
Range	0~6V	0~16V	0~80V	0~6V	0~16V	0~80V
Resolution	0.1mV	1mV	1mV	0.1mV	1mV	1mV
Accuracy	0.05%+0.1%F.S.			0.05%+0.1%F.S.		
Constant Power Mode						
Range	0~2W	0~10W	0~100W	0~6W	0~30W	0~300W
Resolution *9	1mW	10mW	100mW	3.2mW	32mW	320mW
Accuracy *4	0.3%+0.3%F.S.			0.3%+0.3%F.S.		
Dynamic Mode - CC						
Min. Operating Voltage	1.5V			1.5V		
Frequency	100Hz~50kHz/0.01Hz~1kHz			100Hz~50kHz/0.01Hz~1kHz		
Duty	1~99% (Min. Rise Time Dominated)			1~99% (Min. Rise Time Dominated)		
Accuracy	1μs/1ms+100ppm			1μs/1ms+100ppm		
Slew Rate	0.04A/ms~0.02A/μs	0.4A/ms~0.2A/μs	4A/ms~2A/μs	0.12A/ms~0.06A/μs	1.2A/ms~0.6A/μs	12A/ms~6A/μs
Resolution	0.01mA/μs	0.1mA/μs	1mA/μs	0.01mA/μs	0.1mA/μs	1mA/μs
Accuracy	10% ± 20μs			10% ± 20μs		
Min. Rise Time	10 μs			10 μs		
Current						
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Resolution	0.01mA	0.1mA	1mA	0.01mA	0.1mA	1mA
Ext Wave Mode(20kHz) : CC						
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Level	0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.		
Measurement						
Voltage Read Back						
Range	0~6V	0~16V	0~80V	0~6V	0~16V	0~80V
Resolution	0.1069mV	0.2849mV	1.3537mV	0.1069mV	0.2849mV	1.3537mV
Accuracy *5	0.025%+0.01%F.S.		0.01%+0.025%F.S.	0.025%+0.01%F.S.		0.01%+0.025%F.S.
Current Read Back						
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Resolution	0.003349mA	0.034628mA	0.329561mA	0.009942mA	0.101748mA	1.009878mA
Accuracy *5	0.05%+0.05%F.S.			0.05%+0.05%F.S.		
Power Read Back						
Range	0~16W	0~30W	0~100W	0~30W	0~60W	0~300W
Accuracy *5	0.1%+0.1%F.S.			0.1%+0.1%F.S.		
Voltage Monitor						
Bandwidth	20 kHz			20 kHz		
Range	0~6V	0~16V	0~80V	0~6V	0~16V	0~80V
Output	0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.		
Current Monitor						
Bandwidth	20 kHz			20 kHz		
Range	0~0.2A	0~2A	0~20A	0~0.6A	0~6A	0~60A
Output	0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.		

Battery Test & Automation Solution
 Photovoltaic Test & Automation Solution
 Semiconductor/IC Test Solution
 Optical Devices Test Solution
 LED/Lighting Test Solution
 FPD Test Solution
 Video & Color Test Solution
 Optical Inspection Solution
 Power Electronics Test Solution
 Passive Component Test Solution
 Electrical Safety Test Solution
 General Purpose Test Solution
 Thermoelectric Test & Control Solution
 PXI Test & Measurement Solution
 Manufacturing Execution Systems Solution

SPECIFICATIONS-2									
Model	63630-600-15			63640-80-80			63640-150-60		
Configuration	300W			400W			400W		
Voltage *1 *8	0~600V			0~80V			0~150V		
Current	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A	0~1A	0~6A	0~60A
Power *2	0~90W	0~300W	0~300W	0~60W	0~60W	0~400W	0~90W	0~400W	0~400W
Static Mode									
Typical Min. Operating Voltage (DC)	2V@0.15A	2V@1.5A	2V@15A	0.4V@0.8A	0.4V@8A	0.4V@80A	0.3V@1A	0.3V@6A	0.9V@30A 1.8V@60A
Constant Current Mode									
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A	0~1A	0~6A	0~60A
Resolution	0.005mA	0.05mA	0.5mA	0.01mA	0.1mA	1mA	0.02mA	0.1mA	1mA
Accuracy	0.1%+0.1%F.S.			0.1%+0.1%F.S.			0.04%+0.04%F.S.		
Constant Resistance Mode									
Range	CRL : 0.133~270Ω (300W/80V) CRM : 1.92~4kΩ (300W/150V) CRH : 208~200kΩ (300W/600V)			CRL : 0.01~20Ω (400W/6V) CRM : 0.36~720Ω (400W/16V) CRH : 1.45~2.9kΩ (400W/80V)			CRL : 0.03~60Ω (400W/16V) CRM : 0.64~800Ω (400W/80V) CRH : 6.25~1.5kΩ (400W/150V)		
Resolution *9	0.2435mS			1.322mS			1mS		
Accuracy *3	0.1%+0.025S (80V) 0.1%+0.0005S (150V) 0.1%+0.0003S (600V)			0.1%+0.275S (6V) 0.1%+0.036S (16V) 0.1%+0.01375S (80V)			0.1%+0.067S (16V) 0.1%+0.00625S (80V) 0.1%+0.002S (150V)		
Constant Voltage Mode									
Range	0~80V	0~150V	0~600V	0~6V	0~16V	0~80V	0~16V	0~80V	0~150V
Resolution	1mV	10mV	10mV	0.1mV	1mV	1mV	1mV	1mV	10mV
Accuracy	0.05%+0.1%F.S.			0.05%+0.1%F.S.			0.025%+0.025%F.S.		
Constant Power Mode									
Range	0~6W	0~30W	0~300W	0~8W	0~40W	0~400W	0~8W	0~40W	0~400W
Resolution *9	5.625mW	56.25mW	562.5mW	4mW	40mW	400mW	4mW	40mW	400mW
Accuracy *4	0.3%+0.3%F.S.			0.3%+0.3%F.S.			0.3%+0.3%F.S.		
Dynamic Mode - CC									
Min. Operating Voltage	3V			1.5V			1.8V		
Frequency	100Hz~50kHz/0.01Hz~1kHz			100Hz~50kHz/0.01Hz~1kHz			100Hz~50kHz/0.01Hz~1kHz		
Duty	1~99% (Min. Rise Time Dominated)			1~99% (Min. Rise Time Dominated)			1~99% (Min. Rise Time Dominated)		
Accuracy	1μs/1ms+100ppm			1μs/1ms+100ppm			1μs/1ms+100ppm		
Slew rate	0.03A/ms ~0.015A/μs	0.3A/ms ~0.15A/μs	3A/ms ~1.5A/μs	0.16A/ms ~0.08A/μs	1.6A/ms ~0.8A/μs	16A/ms ~8A/μs	0.2A/ms ~0.1A/μs	1.2A/ms ~0.6A/μs	12A/ms ~6A/μs
Resolution	0.005mA/μs	0.05mA/μs	0.5mA/μs	0.01mA/μs	0.1mA/μs	1mA/μs	0.02mA/μs	0.1mA/μs	1mA/μs
Accuracy	10% ± 20μs			10% ± 20μs			10% ± 20μs		
Min. Rise Time	10 μs			10 μs			10 μs		
Current									
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A	0~1A	0~6A	0~60A
Resolution	0.005mA	0.05mA	0.5mA	0.01mA	0.1mA	1mA	0.02mA	0.1mA	1mA
Ext Wave Mode(20kHz) : CC									
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A	0~1A	0~6A	0~60A
Level	0~10V			0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.			0.5%F.S.		
Measurement									
Voltage Read Back									
Range	0~80V	0~150V	0~600V	0~6V	0~16V	0~80V	0~16V	0~80V	0~150V
Resolution	1.4194mV	2.661mV	10.645mV	0.1069mV	0.2849mV	1.3537mV	0.27mV	1.3mV	2.5mV
Accuracy *5	0.025%+0.01%F.S.		0.01%+ 0.025%F.S.	0.025%+0.01%F.S.		0.01%+ 0.025%F.S.	0.025%+0.01%F.S.		
Current Read Back									
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A	0~1A	0~6A	0~60A
Resolution	0.00275mA	0.0266mA	0.255mA	0.013695mA	0.138766mA	1.31406mA	0.02mA	0.1mA	1mA
Accuracy *5	0.05%+0.05%F.S.			0.05%+0.05%F.S.			0.04%+0.04%F.S.		
Power Read Back									
Range	0~90W	0~300W	0~300W	0~60W	0~60W	0~400W	0~8W	0~40W	0~400W
Accuracy *5	0.1%+0.1%F.S.			0.1%+0.1%F.S.			0.1%+0.1%F.S.		
Voltage Monitor									
Bandwidth	20 kHz			20 kHz			20 kHz		
Range	0~80V	0~150V	0~600V	0~6V	0~16V	0~80V	0~16V	0~80V	0~150V
Output	0~10V			0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.			0.5%F.S.		
Current Monitor									
Bandwidth	20 kHz			20 kHz			20 kHz		
Range	0~0.15A	0~1.5A	0~15A	0~0.8A	0~8A	0~80A	0~1A	0~6A	0~60A
Output	0~10V			0~10V			0~10V		
Accuracy	0.5%F.S.			0.5%F.S.			0.5%F.S.		

GENERAL SPECIFICATION					
Model	63610-80-20	63630-80-60	63630-600-15	63640-80-80	63640-150-60
Program mode					
Sequence No.	100/Program				
Dwell / SEQ	0.1ms ~ 30s (Resolution : 0.1ms)				
Load Setting	Refer to Static mode specifications				
Spec Check	Voltage/Current/Power				
Protection					
Over Power	Yes				
Over Current	Yes				
Over Voltage Alarm*8	Yes				
Over Temperature	Yes				
Reverse	Yes				
Interface					
USB	Standard				
Ethernet	Optional				
GPIB	Optional				
System BUS	Master/Slave				
Dout					
No. of bits	2 bits per mainframe				
Level - H	1.8V/3.3V/5V switchable				
Level - L	<0.6V@I _{sink} =10mA				
Drive	Pull_up resistor = 4.7kΩ				
Din (TTL Compatible, Rising Edge)					
No. of bits	2 bits per mainframe				
External Trig. for Digitizing					
No. of bits	1 bit per mainframe				
External Trig. for Auto Sequences (TTL Compatible, Rising Edge)					
No. of bits	1 bit per mainframe				
Load ON - O/P					
Level	TTL Compatible, Level, Active High				
Short ON - O/P					
No. of channels	2 channels per 63600-1 mainframe 4 channels per 63600-2 mainframe 6 channels per 63601-5 mainframe 10 channels per 63600-5 mainframe				
Level	TTL Compatible, Level, Active High				
Short circuit					
Current *6	Set to 100% of rated current				
Input Resistance (Load Off)	700kΩ (Typical)	700kΩ (Typical)	2MΩ (Typical)	700kΩ (Typical)	700kΩ (Typical)
Dimensions (HxWxD)	142 x 86 x 514 mm / 5.6 x 3.4 x 20.2 inch				
Weight	5 kg / 11 lbs	4 kg / 8.8 lbs	5 kg / 11 lbs	4.5 kg / 9.9 lbs	4.5 kg / 9.9 lbs
Operating Temperature	0~40°C				
Storage Temperature	-20~80°C				
Power	Supply from mainframe				
EMC & Safety	CE				

NOTE*1 : The maximum current loading below the minimum operating voltage (0.5V) will follow a derating curve.

NOTE*2 : The 400W power rating of the 63640-80-80 specified at an ambient temperature of 35°C, please refer to the power rating curve on the right.

NOTE*3 : Does not apply to setting current < 0.25% full scale current in high range. Does not apply to setting current < 0.05% full scale current in low and middle range.

NOTE*4 : The full scale is V_{max} x I_{max}.

NOTE*5 : The DC level measurements are made over a period of 20ms, and does not measure any transient signals in the DC measurements.

NOTE*6 : Its limits are the maximum power and maximum current of the current range.

NOTE*7 : The 63600 is guaranteed to meet specified performance at temperature range of 25 ± 5°C.

NOTE*8 : If the operating voltage exceeds the rated voltage for 1.1 times, it would cause permanent damage to the device.

NOTE*9 : Please refer to user's manual for detail specifications, and S (siemens) is the SI unit of conductance, equal to one reciprocal ohm.

Softpanel



Main Operation Menu



Battery Discharge Test



User Defined Waveform

All specifications are subject to change without notice.