

AFV series

Preen®

Programmable AC Power Source 15-2000kVA

<http://www.PreenPower.com>



AC + DC
Power Solutions

AC POWER CORP.



7-inch Touch Screen



AFV Series Product Features

1. Touch Screen

easy to operate rich colors able to simulate change curve suitable for non-harsh environment such as laboratory and R&D center

2. High Efficiency

Power Efficiency $\geq 90\%$, energy saving and eco-friendly

3. Programmable output voltage and frequency functionality:


generic mode, step change mode, gradual change mode and curve change simulation

- ① Generic mode (standard): one set of output voltage and output frequency
- ② Step Change Mode (optional): up to 24 sets of output voltage and frequency are available for configuration. Each voltage, frequency and running time can be set separately.
- ③ Gradual Change Mode (optional): up to 12 sets of output voltage and frequency are available for configuration. Each set includes starting voltage, starting frequency and ending voltage, ending frequency and running time.
- ④ Curve change simulation (optional): voltage and frequency variation simulation can be made according to customer's requirement and relevant standard.



Voltage and Frequency Setting Interface at Step Change Mode

Step Change Mode

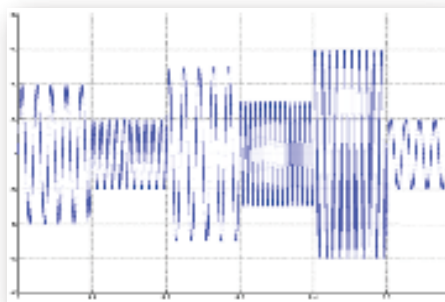


Voltage and Frequency Change Schematic Diagram



Voltage and Frequency Setting Interface at Gradual Change Mode

Gradual Change Mode

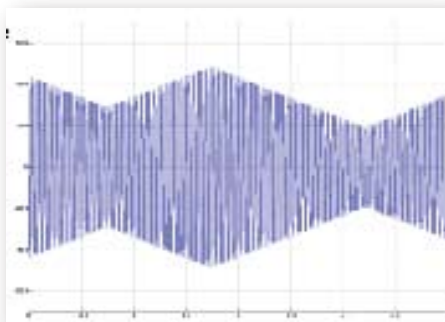

Voltage and Frequency Change Schematic Diagram

Application of AFV series



Electric Motor




Home Applications




Switched-mode Power Supply




Air Conditioning Compressor



Transformer Test



EMC Test



Product Life Cycle Test




Product Test and R&D

4. Multiple communication ports to choose


- ① RS232 or RS485 are available; option to support MODBUS
- ② GPIB and USB are optional; option to support SCPI or LabVIEW.

5. Soft start function (optional): VVCF or VVVF soft start is specially designed for electric motor testing

Inrush current is reduced; therefore lower power capacity and purchase cost are needed

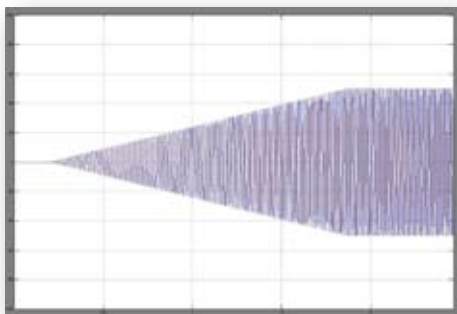

Method 1: VVCF soft start Schematic Diagram

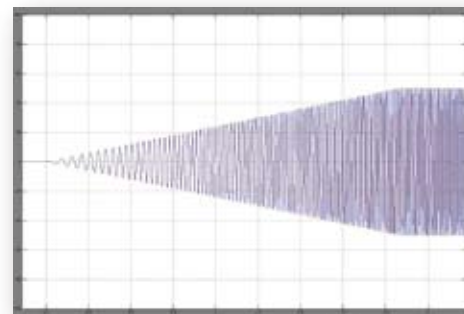

Method 2: VVVF soft start Schematic Diagram

6. Enhanced troubleshooting function

- ① Fault code is shown in the screen in the event of fault; to enable quick troubleshooting and reduce downtime and therefore enhance uptime
- ② Fault code and message in the AFV unit can be replicated into USB memory stick for further survey

7. Back-feed protection

When back-feeding occurs, over voltage is detected and then output is switched off immediately to protect load equipment and maintain safety


8. Independently adjustable three-phase output (Optional)

- ① Three-phase output voltage (and frequency) is independently adjustable
- ② Work as one unit of three-phase power source or as three units of Single-phase power source

9. Option for two-unit operation in parallel

10. Eco-friendly and high-efficiency design

- Power module technology: used to make size smaller and power density higher
- SMD technology: used to enhance the reliability of the AFV unit
- High-efficiency IGBT: low EMI and high inverter efficiency
- Lightning protection module: prevent a lightning storm from damaging the input/output circuitry and the AFV unit and load equipment
- Variable-speed fans: low noise, low maintenance and high energy efficiency

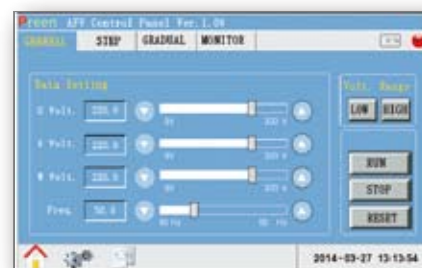

AFV -

AFV Series
Frequency Converter

3
Input Phase
3

3
Output Phase
3

060
Capacity
60kVA

T
Input Voltage
220/380Vac

[Please contact us for other voltage specification]

AFV series Three Phase–Three Phase(15~400kVA)

Model			AFV-33015	AFV-33020	AFV-33030	AFV-33045	AFV-33060	AFV-33075	AFV-33100	AFV-33120	AFV-33150	AFV-33200	AFV-33300	AFV-33400	
Capacity(kVA)			15	20	30	45	60	75	100	120	150	200	300	400	
Input	Phase		Three Phase												
	Voltage		120V/208V, 220V/380V, or 277V/480V ①												
	Voltage range		220V/380V±15%												
	Frequency range		47~63Hz												
	Power Factor		0.9												
Max.current(A) (With full load)			28.1	37.4	56.1	84.2	112.2	140.3	187.1	224.5	280.6	374.1	561.2	748.2	
Output	Phase		Three Phase												
	Wave		SINE Wave												
	Voltage	Low(V)	0V ~ 150.0V (L-N)												
		High(V)	150.1V ~ 300.0V (L-N)												
	Frequency range		45 ~ 65Hz. Optional 45 ~ 500Hz												
	Frequency regulation		≤0.01%												
	Max. Current(A)	High(A)	20.8	27.8	41.7	62.5	83.3	104.2	138.9	166.7	208.3	277.8	416.7	555.6	
		Low(A)	41.7	55.6	83.3	125.0	166.7	208.3	277.8	333.3	416.7	555.6	833.3	1111.1	
System	Line regulation		<1%												
	Load regulation		±1% (linear load)												
	THD		≤2%(linear load)												
	Efficiency		≥90%												
	Response time		≤2ms												
	Crest Factor		3 : 1												
Protection			Input no-fuse breaker,electronic circuit instant trip for over/low voltage,over current,over load,over temperature and short circuit protection and alarm system												
Readings	Display		VFD(Touch screen Option)												
	Voltage		Res.: 0.1V, Accuracy: 0.5%FS+4Counts.												
	Current		Res.: 0.1A, Accuracy: 0.5%FS+4Counts.												
	Frequency		Res.: 0.1Hz, Accuracy:0.5%FS+4Counts.												
Control mode	RS-232		Standard												
	RS-485		Standard												
	GPIB		Option												
Safety	Insulation resistance		10M ohm(Tested with DC 500V)												
	Insulation withstand voltage		Tested with AC 1,800V 10mA for 1min												
Environment	Cooling system		Fan Cooling												
	Temperature[Operating]		0℃ ~ 45℃												
	Humidity[Operating]		0~90% (Non-condensing)												
	Altitude[Operating]		<1500m												
Dimensions (W*D*H) mm			650×920×1248			700×800×1620			940×820×1700			1100×940×1850		1400×1040×2000	
Weight(kg)			400	415	425	435	490	525	716	777	1300	1400	2200	2500	

P.S.: ^① Please contact us for other voltage specification;



AFV series Three Phase–Three Phase(500~2000kVA)

Model			AFV-33500	AFV-33600	AFV-33800	AFV-331000	AFV-331200	AFV-331500	AFV-332000
Capacity(kVA)			500	600	800	1000	1200	1500	2000
Input	Phase		Three Phase						
	Voltage		120V/208V, 220V/380V, or 277V/480V ❶						
	Voltage range		220V/380V±15%						
	Frequency range		47~63Hz						
	Power Factor		0.85						
	Max.current(A) (With full load)		990.3	1188.4	1584.5	1980.6	2376.7	2970.9	3961.2
Output	Phase		Three Phase						
	Wave		SINE Wave						
	Voltage	Low(V)	0V ~ 150.0V (L-N)						
		High(V)	150.1V ~ 300.0V (L-N)						
	Frequency range		45 ~ 65Hz. Optional 45 ~ 500Hz						
	Frequency regulation		≤0.01%						
	Max. Current(A)	High(A)	694.4	833.3	1111.1	1388.9	1666.7	2083.3	2777.8
		Low(A)	1388.9	1666.7	2222.2	2777.8	3333.3	4166.7	5555.6
System	Line regulation		<1%						
	Load regulation		±1% (linear load)						
	THD		≤2%(linear load)						
	Efficiency		≥90%						
	Response time		≤2ms						
	Crest Factor		3 : 1						
Protection		Input no-fuse breaker,electronic circuit instant trip for over/low voltage,over current,over load,over temperature and short circuit protection and alarm system							
Readings	Display		Touch screen						
	Voltage		Res.: 0.1V, Accuracy: 0.5%FS+4Counts.						
	Current		Res.: 0.1A, Accuracy: 0.5%FS+4Counts.						
	Frequency		Res.: 0.1Hz, Accuracy:0.5%FS+4Counts.						
Control mode	RS-232		Option						
	RS-485		Standard						
	GPIB		Option						
Safety	Insulation resistance		10M ohm(Tested with DC 500V)						
	Insulation withstand voltage		Tested with AC 1,800V 10mA for 1min						
Environment	Cooling system		Fan Cooling						
	Temperature[Operating]		0℃ ~ 45℃						
	Humidity[Operating]		0~90% (Non-condensing)						
	Altitude[Operating]		<1500m						
Dimensions (W*D*H) mm			4900×1400×2050			6300×1500×2050		---	
Weight(kg)			4500	5200	7000	8500	9200	---	---

P.S.: ① Please contact us for other voltage specification;

AC POWER CORP.

Specialized in power electronics, Preen (AC Power Corp.) has been developing products based on its core technology of Power Conversion. Product Line includes AC Power Sources, DC Power Supplies, Power Supplies for Defense Industry, Renewable Energy Simulators, Line Conditioners and UPS. Boasting one of the broadest product line in the industries, Preen specializes in High Power Source and has developed AC power source up to 2MVA with high power density.


Product Lines



- Up to 1000Hz
- 500VA ~ 2,000kVA
- Regenerative Function



- Up to 2,000V
- 2kW ~ 300kW
- Fast Response & Low Ripple



- Solid State & Inductive types
- Up to 1500kVA

Applications



Renewable Energy



Laboratory



Aircraft Manufacturing



Transport System



EMC Chamber



Medical Equipment



Control Room / Data Center



Electronics



ATE System



Airport Apron / Hangar



Home Appliance



Motor / Engine



Communication Equipment



Military Aircraft / Helicopter



Navy System



Defense Equipment

Preen®

Taipei

3F, No.200 Gangqian Road, Neihu Dist., Taipei 114, Taiwan
TEL +886 2-2627-1899 FAX +886 2-2627-1879

USA

192 Technology Dr., Suite S, Irvine, CA 92618
TEL +1 949-988-7799

