

MA100RWI Series

Wide 2:1 Input, 1.5W, High 3.5 kVDC Isolation DC/DC Converters



Key Features:

- 1.5W Output Power
- 2:1 Input Voltage Range
- 3,500 VDC Isolation
- 40 Standard Models
- High Efficiency
- Compact DIP Case
- -40°C to +85°C Operation
- Metal Case Available
- Low Cost

Alternate
Pin-Out
Available

1.5 kV Isolation
Models
Available

RoHS



MicroPower Direct



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	9.0	VDC
	12 VDC Input	9.0	12.0	18.0	
	24 VDC Input	18.0	24.0	36.0	
	48 VDC Input	36.0	48.0	72.0	
Input Reflected Ripple Current			35		mA P - P
Input Filter	π (Pi) Filter				

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±1.0		%
Line Regulation	V _{IN} = Min to Max		±0.5		%
Load Regulation	I _{OUT} = 25% to 100%		±0.5		%
Cross Regulation	See Note 1		±0.5		%
Ripple & Noise (20 MHz)	See Note 2		60		mV P - P
Temperature Coefficient			±0.02		%/°C
Output Short Circuit	Continuous (Autorecovery)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage, See Note 3	3 Seconds	3,500			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz/0.1V		60		pF
Switching Frequency		100		400	kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Operating Temperature Range	Case			+100	°C
Storage Temperature Range		-40		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	1.25 x 0.80 x 0.40 Inches (31.75 x 20.32 x 10.16 mm)				
Case Material, Plastic	Non-Conductive Black Plastic (UL94-V0)				
Weight, Plastic Case	0.44 Oz (12.5g)				
Case Material, Metal	Nickel-Coated Copper With Non-Conductive Base (UL94-V0)				
Weight, Metal Case	0.53 Oz (15g)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	2.19			MHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		15.0	VDC
	12 VDC Input	-0.7		24.0	
	24 VDC Input	-0.7		40.0	
	48 VDC Input	-0.7		80.0	
Lead Temperature	1.5 mm From Case for 10 Sec			260	°C

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

Model Selection Guide

CompuMess Elektronik GmbH · Lise-Meitner-Straße 4 · D-85716 Unterschleißheim
 Telefon (089) 32 1501-0 · Telefax (089) 32 1501-11
 info@compumess.de · www.compumess.de · www.netzteile.de

Model Number	Input				Output			Efficiency (% Typ)	Reflected Ripple Current (mA Typ)	Capacitive Load (µF, Max)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)				
	Nominal	Range	Full-Load	No-Load							
MA105S-05RWI-xx	5	4.5 - 9.0	461	40	5.0	300.0	75.0	65	35.0	2,200	1,000
MA105S-09RWI-xx	5	4.5 - 9.0	447	40	9.0	167.0	41.7	67	35.0	470	1,000
MA105S-12RWI-xx	5	4.5 - 9.0	428	40	12.0	125.0	31.3	70	35.0	470	1,000
MA105S-15RWI-xx	5	4.5 - 9.0	447	40	15.0	100.0	25.0	67	35.0	470	1,000
MA105S-24RWI-xx	5	4.5 - 9.0	454	40	24.0	62.5	15.6	66	35.0	220	1,000
MA105D-05RWI-xx	5	4.5 - 9.0	461	40	±5.0	±150.0	±37.5	65	35.0	±1,000	1,000
MA105D-09RWI-xx	5	4.5 - 9.0	447	40	±9.0	±83.3	±20.8	67	35.0	±220	1,000
MA105D-12RWI-xx	5	4.5 - 9.0	428	40	±12.0	±62.5	±15.6	70	35.0	±220	1,000
MA105D-15RWI-xx	5	4.5 - 9.0	447	40	±15.0	±50.0	±12.5	67	35.0	±220	1,000
MA105D-24RWI-xx	5	4.5 - 9.0	454	40	±24.0	±31.0	±7.7	66	35.0	±100	1,000
MA112S-05RWI-xx	12	9.0 - 18.0	169	20	5.0	300.0	75.0	74	35.0	2,200	500
MA112S-09RWI-xx	12	9.0 - 18.0	162	20	9.0	167.0	41.7	77	35.0	470	500
MA112S-12RWI-xx	12	9.0 - 18.0	164	20	12.0	125.0	31.3	76	35.0	470	500
MA112S-15RWI-xx	12	9.0 - 18.0	160	20	15.0	100.0	25.0	78	35.0	470	500
MA112S-24RWI-xx	12	9.0 - 18.0	160	20	24.0	62.5	15.6	78	35.0	220	500
MA112D-05RWI-xx	12	9.0 - 18.0	169	20	±5.0	±150.0	±37.5	74	35.0	±1,000	500
MA112D-09RWI-xx	12	9.0 - 18.0	164	20	±9.0	±83.3	±20.8	76	35.0	±220	500
MA112D-12RWI-xx	12	9.0 - 18.0	166	20	±12.0	±62.5	±15.6	75	35.0	±220	500
MA112D-15RWI-xx	12	9.0 - 18.0	160	20	±15.0	±50.0	±12.5	78	35.0	±220	500
MA112D-24RWI-xx	12	9.0 - 18.0	160	20	±24.0	±31.0	±7.7	78	35.0	±100	500
MA124S-05RWI-xx	24	18.0 - 36.0	84.5	12	5.0	300.0	75.0	74	35.0	2,200	200
MA124S-09RWI-xx	24	18.0 - 36.0	84.5	12	9.0	167.0	41.7	74	35.0	470	200
MA124S-12RWI-xx	24	18.0 - 36.0	82.0	12	12.0	125.0	31.3	76	35.0	470	200
MA124S-15RWI-xx	24	18.0 - 36.0	82.0	12	15.0	100.0	25.0	76	35.0	470	200
MA124S-24RWI-xx	24	18.0 - 36.0	81.0	12	24.0	62.5	15.6	77	35.0	220	200
MA124D-05RWI-xx	24	18.0 - 36.0	83.0	12	±5.0	±150.0	±37.5	75	35.0	±1,000	200
MA124D-09RWI-xx	24	18.0 - 36.0	82.0	12	±9.0	±83.3	±20.8	76	35.0	±220	200
MA124D-12RWI-xx	24	18.0 - 36.0	81.0	12	±12.0	±62.5	±15.6	77	35.0	±220	200
MA124D-15RWI-xx	24	18.0 - 36.0	80.0	12	±15.0	±50.0	±12.5	78	35.0	±220	200
MA124D-24RWI-xx	24	18.0 - 36.0	80.0	12	±24.0	±31.0	±7.7	78	35.0	±100	200
MA148S-05RWI-xx	48	36.0 - 72.0	43.0	8	5.0	300.0	75.0	73	35.0	2,200	100
MA148S-09RWI-xx	48	36.0 - 72.0	42.0	8	9.0	167.0	41.7	75	35.0	470	100
MA148S-12RWI-xx	48	36.0 - 72.0	40.5	8	12.0	125.0	31.3	77	35.0	470	100
MA148S-15RWI-xx	48	36.0 - 72.0	40.5	8	15.0	100.0	25.0	77	35.0	470	100
MA148S-24RWI-xx	48	36.0 - 72.0	40.0	8	24.0	62.5	15.6	78	35.0	220	100
MA148D-05RWI-xx	48	36.0 - 72.0	42.0	8	±5.0	±150.0	±37.5	74	35.0	±1,000	100
MA148D-09RWI-xx	48	36.0 - 72.0	42.0	8	±9.0	±83.3	±20.8	75	35.0	±220	100
MA148D-12RWI-xx	48	36.0 - 72.0	40.5	8	±12.0	±62.5	±15.6	77	35.0	±220	100
MA148D-15RWI-xx	48	36.0 - 72.0	40.0	8	±15.0	±50.0	±12.5	78	35.0	±220	100
MA148D-24RWI-xx	48	36.0 - 72.0	40.0	8	±24.0	±31.0	±7.7	78	35.0	±100	100


For the alternate pin-out (see page 4), add suffix "P2" to model number (i.e. MA124S-05RWI-P2)

Notes:


1. Cross regulation is measured with the output being tested at 100% load while the other output is varied from 25% to 100% load.
2. See the typical connection circuit on page three for typical external filtering components. For help with a specific model or layout issue, contact the factory.
3. Isolation voltage is specified for Input to output. On units with the optional metal case, the isolation voltage for Input - Case and Output - Case is 1,000 VDC.
4. Operation at no-load will not damage the unit, but they may not meet all specifications. To meet all specifications, a minimum load of 25% should be maintained.
5. It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

Model Number

MA-1XXX-XXRXMI

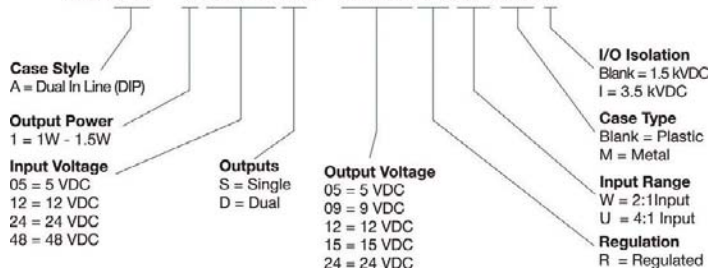

Typical Connection

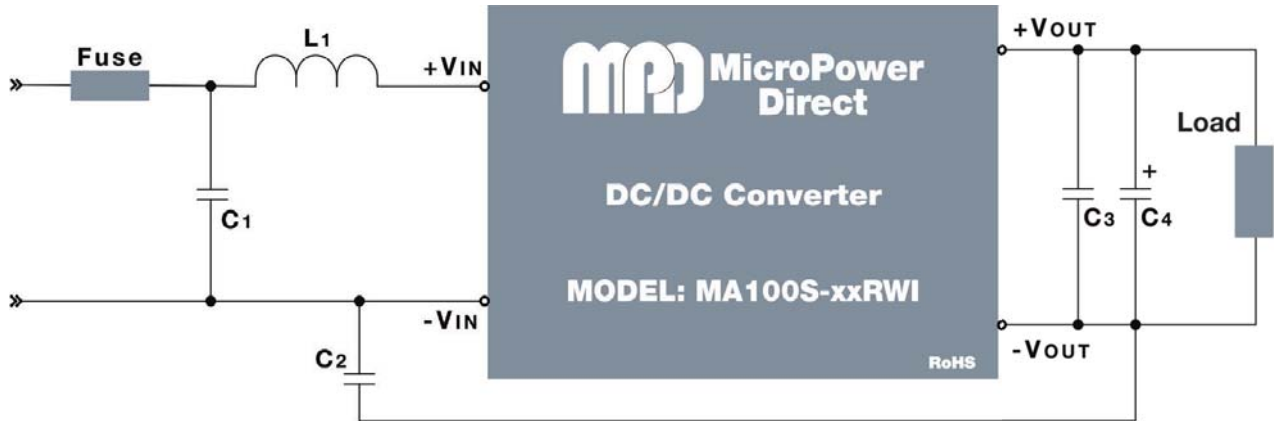


The diagram above illustrates a typical connection of the **MA100RWI** series for applications that require meeting conducted EMC standards. The units do not require external components to operate as specified. For applications requiring very low output noise levels, the output filtering capacitors (C₃ is a low ESR electrolytic & C₄ is a ceramic) will often be sufficient. Care must be taken in choosing output capacitors not to exceed the capacitive load specification for the unit. For dual output units, output capacitors should be connected from each output to common. All external components should be mounted as close to the unit as possible.


The recommended values for components are:

Component	5 V _{IN}	12 V _{IN}	24 V _{IN}	48 V _{IN}
C ₁	220 µF/25V	220 µF/50V	220 µF/100V	220 µF/100V
LCM	12 µH	12 µH	12 µH	12 µH
C ₂	---	---	470 pF/4kV MLCC	470 pF/4kV MLCC
C ₃	100 µF	100 µF	100 µF	100 µF
C ₄	4.7 - 10 µF	4.7 - 10 µF	4.7 - 10 µF	4.7 - 10 µF

Typical Board Layout: With External Filter Components, Single Output

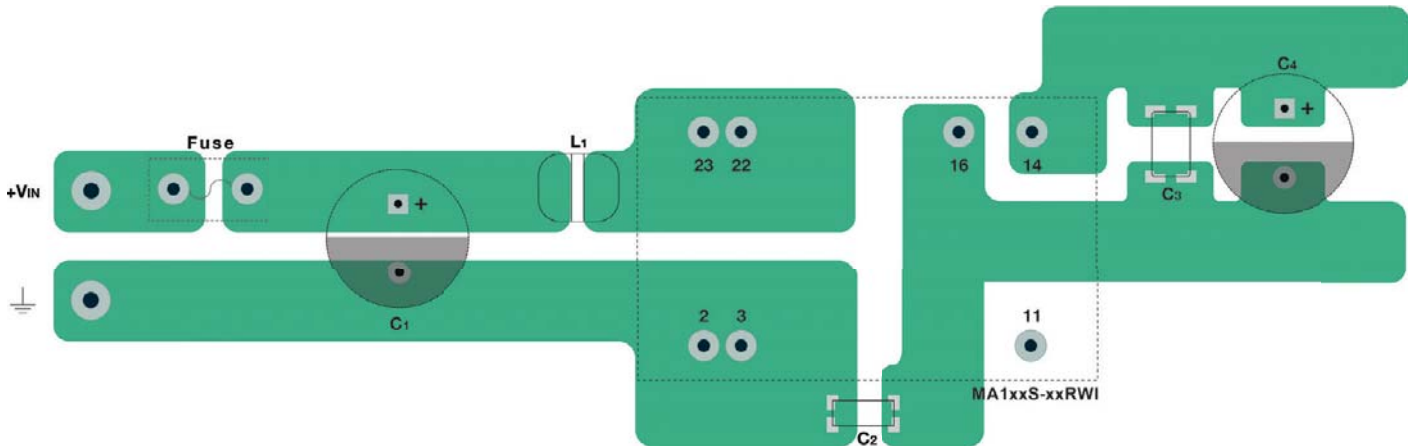

Typical Board Layout: With External Filter Components, Dual Output

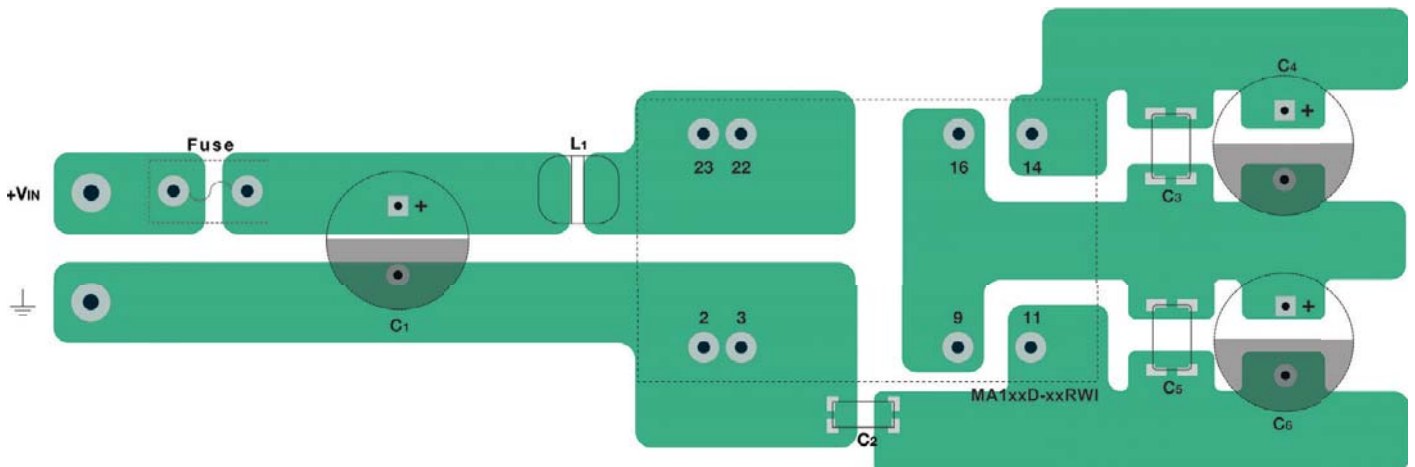


Input noise and surge suppression modules are available for a number of MPD DC/DC power supplies. Contact the factory for more information.


Mechanical Dimensions

CompuMess Elektronik GmbH · Lise-Meitner-Straße 4 · D-85716 Unterschleißheim
 Telefon (089) 32 1501-0 · Telefax (089) 32 1501-11
 info@compumess.de · www.compumess.de · www.netzteile.de

Standard Units - Plastic Case

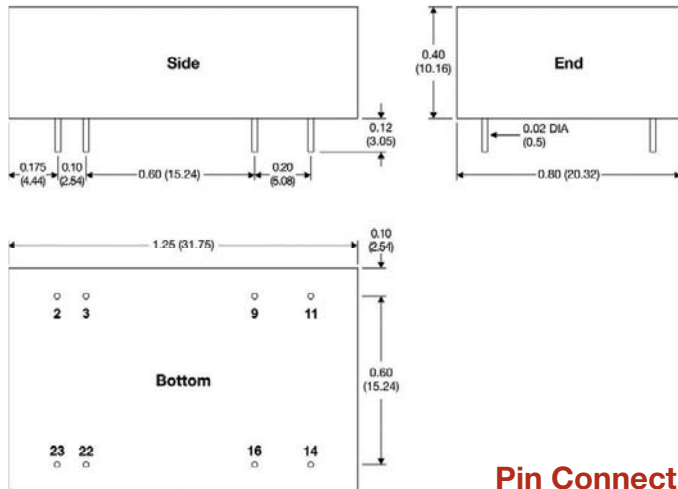

Standard Units - Metal Case

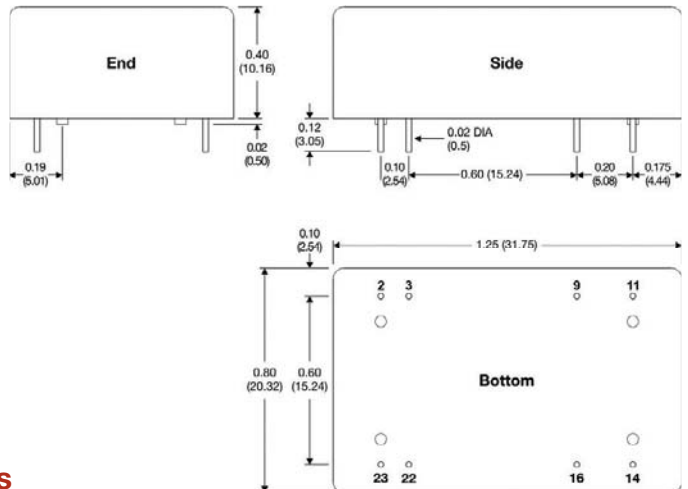


Pin Connections


Pin	Single Output	Pin	Dual Output
2	-VIN	2	-VIN
3	-VIN	3	-VIN
9	No Pin	9	Common
11	No Connection	11	-VOUT
14	+VOUT	14	+VOUT
16	-VOUT	16	Common
22	+VIN	22	+VIN
23	+VIN	23	+VIN

For the alternate pin-out, add suffix "P2" to model number
 (i.e. MA124S-05RWI-P2)

Alternate Pin-Out Units - Plastic Case

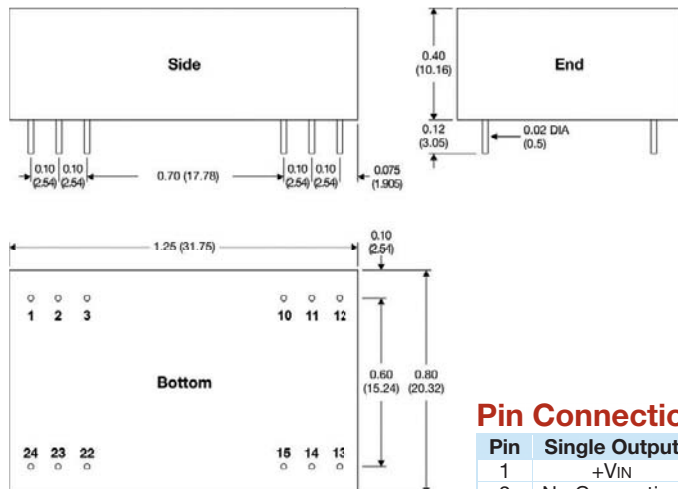

Alternate Pin-Out Units - Metal Case

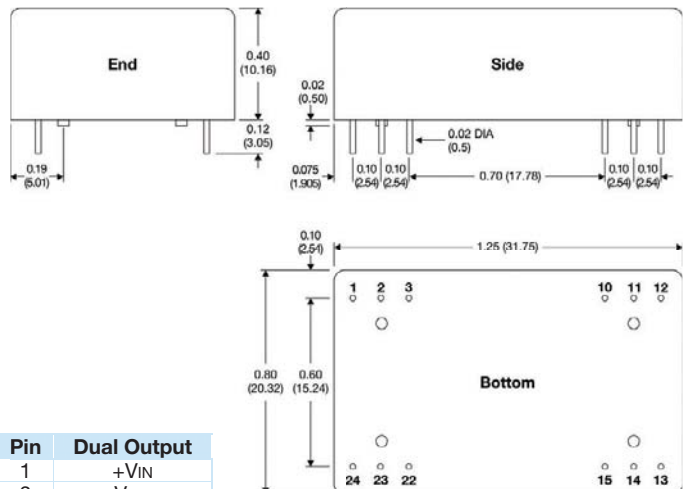

Pin Connections

Pin	Single Output	Pin	Dual Output
1	+VIN	1	+VIN
2	No Connection	2	-VOUT
3	No Connection	3	Common
10	-VOUT	10	Common
11	+VOUT	11	+VOUT
12	-VIN	12	-VIN
13	-VIN	13	-VIN
14	+VOUT	14	+VOUT
15	-VOUT	15	Common
22	No Connection	22	Common
23	No Connection	23	-VOUT
24	+VIN	24	+VIN

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)
- Pin 1 is marked by a "dot" or indentation on the top of the unit



MicroPower Direct
 We Power Your Success - For Less!