


ME100S Series

Low Cost, 1.0W Ultra-Miniature SIP DC/DC Converters

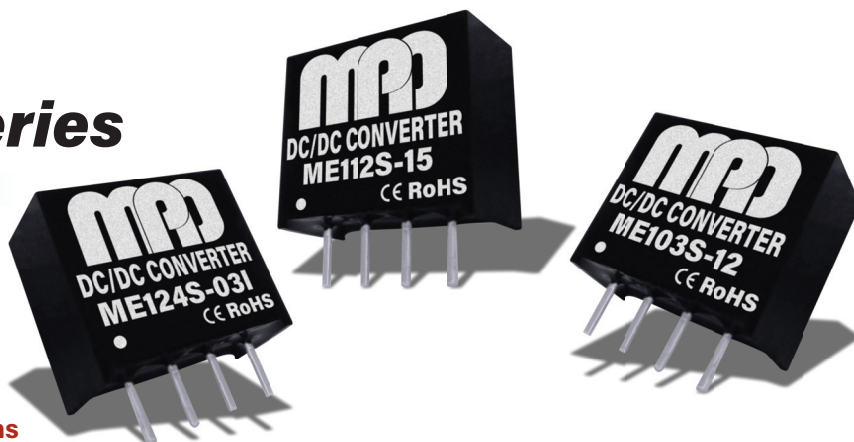

Key Features:

- 1.0W Output Power
- Ultra-Miniature SIP Case
- 40 Standard Models
- Up To 3,000 VDC Isolation
- >1.12 MHour MTBF
- Meets EN 55032 Class B
- -40°C to +85°C Operation

Also Available In
Ultra-Miniature
Mini-DIP Case



MicroPower Direct



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	3.3 VDC Input	2.97	3.3	3.63	VDC
	5 VDC Input	4.50	5.0	5.50	
	12 VDC Input	10.80	12.0	13.20	
	15 VDC Input	13.50	15.0	16.50	
	24 VDC Input	21.60	24.0	26.40	
Input Reflected Ripple Current			20		mA P - P
Input Filter	Internal Capacitors				

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±3.0		%
Line Regulation	For V_{IN} Change of 1%		±1.2		%
Load Regulation, See Note 1	See Model Selection Guide				
Ripple & Noise (20 MHz)			100		mV P - P
Temperature Coefficient			±0.02		%/°C
Output Short Circuit	Momentary (0.5 Sec.)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
	Units With "I" Suffix	3,000			
Isolation Resistance				1,000	MΩ
Isolation Capacitance			60		pF
Switching Frequency	See Note 2		80		kHz

EMI Characteristics, See Page 4

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40		+85	°C
	Case			+100	
Storage Temperature Range		-40		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	See Mechanical Diagrams (Page 6)				
Case Material	Non-Conductive Black Plastic (UL-94V0)				
Weight	See Mechanical Diagrams (Page 6)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.121			MHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (0.1 Sec)	3.3 VDC Input			6.0	VDC
	5 VDC Input			7.0	
	12 VDC Input			15.0	
	15 VDC Input			18.0	
	24 VDC Input			28.0	
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

Model Selection Guide

CompuMess Elektronik GmbH · Lise-Meitner-Straße 4 · D-85716 Unterschleißheim
 Telefon (089) 321501-0 · Telefax (089) 321501-11
 info@compumess.de · www.compumess.de · www.netzteile.de

Model Number	Input				Output		Load Regulation (% Typ)	Efficiency (% Typ)	Capacitive Load (μF, Max)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)				
	Nominal	Range	Full-Load	No-Load						
ME103S-03(I)	3.3	2.97 - 3.63	421	25	3.3	303.0	±20	72	220	1,000
ME103S-05(I)	3.3	2.97 - 3.63	394	25	5.0	200.0	±10	77	220	1,000
ME103S-07(I)	3.3	2.97 - 3.63	384	25	7.2	138.9	±10	79	220	1,000
ME103S-09(I)	3.3	2.97 - 3.63	404	30	9.0	111.1	±10	75	220	1,000
ME103S-12(I)	3.3	2.97 - 3.63	473	45	12.0	100.0	±10	77	220	1,000
ME103S-15(I)	3.3	2.97 - 3.63	384	35	15.0	66.6	±10	79	220	1,000
ME103S-18(I)	3.3	2.97 - 3.63	399	35	18.0	55.5	±10	76	220	1,000
ME103S-24(I)	3.3	2.97 - 3.63	461	53	24.0	50.0	±10	79	220	1,000
ME105S-03(I)	5.0	4.5 - 5.5	257	20	3.3	303.0	±20	78	220	550
ME105S-05(I)	5.0	4.5 - 5.5	247	25	5.0	200.0	±10	81	220	550
ME105S-07(I)	5.0	4.5 - 5.5	241	16	7.2	138.9	±10	83	220	550
ME105S-09(I)	5.0	4.5 - 5.5	250	26	9.0	111.1	±10	80	220	550
ME105S-12(I)	5.0	4.5 - 5.5	300	25	12.0	100.0	±10	80	220	550
ME105S-15(I)	5.0	4.5 - 5.5	244	35	15.0	66.6	±10	82	220	550
ME105S-18(I)	5.0	4.5 - 5.5	247	25	18.0	55.5	±10	81	220	550
ME105S-24(I)	5.0	4.5 - 5.5	289	35	24.0	50.0	±10	83	220	550
ME112S-03(I)	12	10.8 - 13.2	107	15	3.3	151.5	±20	78	220	250
ME112S-05(I)	12	10.8 - 13.2	105	16	5.0	100.0	±10	79	220	250
ME112S-07(I)	12	10.8 - 13.2	100	16	7.2	69.4	±10	83	220	250
ME112S-09(I)	12	10.8 - 13.2	107	15	9.0	55.5	±10	78	220	250
ME112S-12(I)	12	10.8 - 13.2	125	20	12.0	41.6	±10	80	220	250
ME112S-15(I)	12	10.8 - 13.2	105	15	15.0	33.3	±10	79	220	250
ME112S-18(I)	12	10.8 - 13.2	104	20	18.0	27.7	±10	80	220	250
ME112S-24(I)	12	10.8 - 13.2	123	25	24.0	20.8	±10	71	220	250
ME115S-03(I)	15	13.5 - 16.5	89	15	3.3	151.5	±20	75	220	200
ME115S-05(I)	15	13.5 - 16.5	82	9	5.0	100.0	±10	81	220	200
ME115S-07(I)	15	13.5 - 16.5	88	12	7.2	69.4	±10	76	220	200
ME115S-09(I)	15	13.5 - 16.5	90	10	9.0	55.5	±10	74	220	200
ME115S-12(I)	15	13.5 - 16.5	100	13	12.0	41.6	±10	80	220	200
ME115S-15(I)	15	13.5 - 16.5	84	15	15.0	33.3	±10	79	220	200
ME115S-18(I)	15	13.5 - 16.5	85	12	18.0	27.7	±10	78	220	200
ME115S-24(I)	15	13.5 - 16.5	99	10	24.0	20.8	±10	81	220	200
ME124S-03(I)	24	21.6 - 26.4	54	8	3.3	303.0	±20	77	220	125
ME124S-05(I)	24	21.6 - 26.4	52	8	5.0	200.0	±10	80	220	125
ME124S-07(I)	24	21.6 - 26.4	54	10	7.2	138.9	±10	77	220	125
ME124S-09(I)	24	21.6 - 26.4	54	7	9.0	111.1	±10	77	220	125
ME124S-12(I)	24	21.6 - 26.4	62	8	12.0	100.0	±10	80	220	125
ME124S-15(I)	24	21.6 - 26.4	51	8	15.0	66.6	±10	81	220	125
ME124S-18(I)	24	21.6 - 26.4	52	8	18.0	55.5	±10	80	220	125
ME124S-24(I)	24	21.6 - 26.4	60	9	24.0	50.0	±10	83	220	125


For the 3 kV isolation models, add suffix "I" to model number (i.e. ME112S-05I)

Notes:


1. Output load regulation is specified for a load change of 20% to 100%.
2. Switching frequency is typically 80 kHz, but may vary with differing operating conditions.
3. Operation at no-load will not damage these units. However, they may not meet all specifications.
4. All units are rated for operation at full output power to +85°C. Operation over +85°C without airflow is not recommended.
5. It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

Output power should be derated linearly from 100% at 85°C to 0% at 100°C.


Output Load vs Output Voltage: ME105, High Line

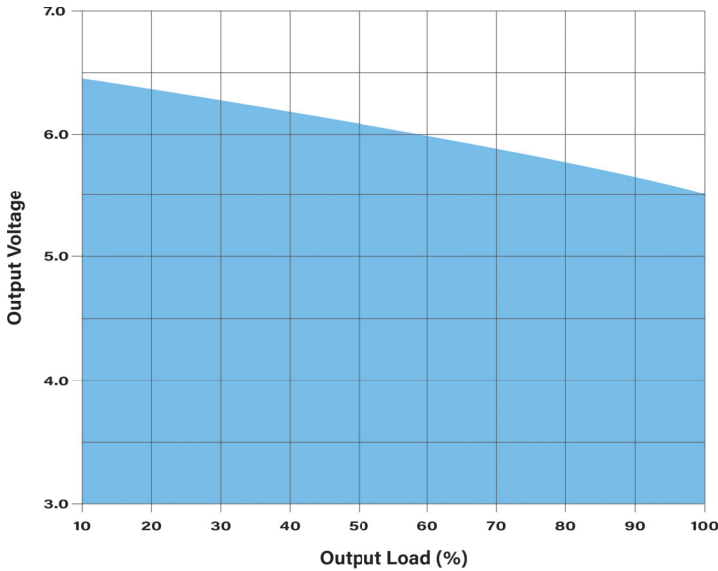


Output Load vs Output Voltage: ME105, Nom Line

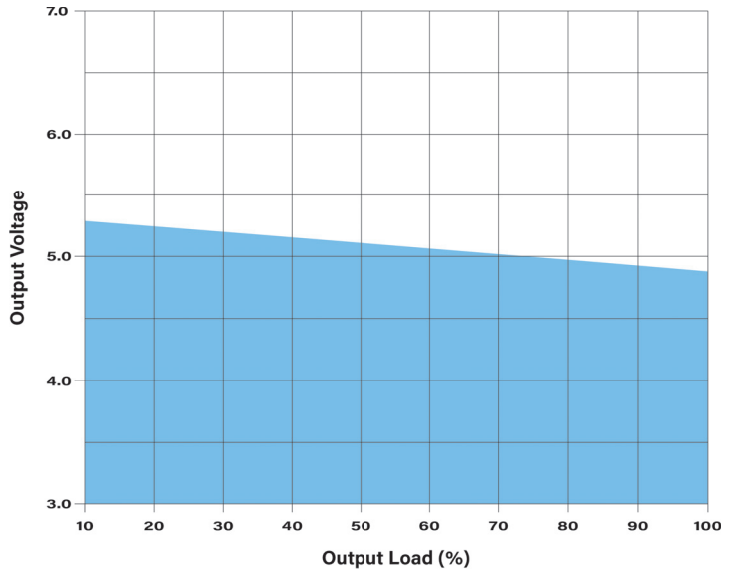


Output Load vs Output Voltage: ME105, Low Line

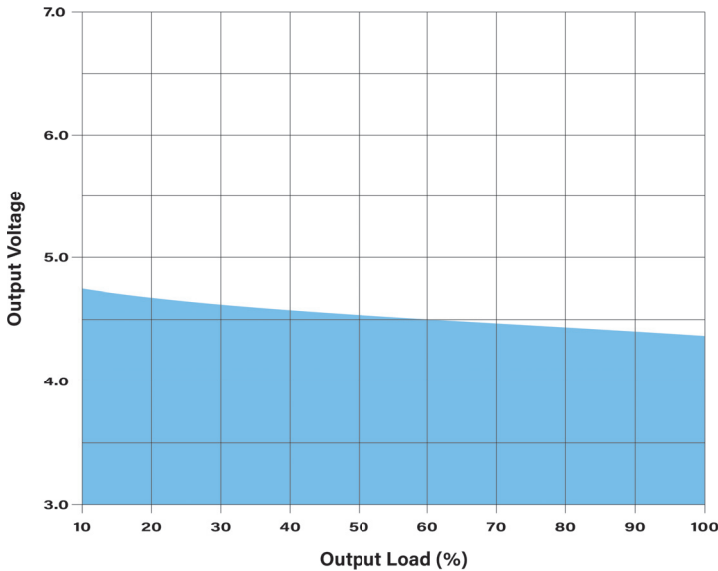


Output Load vs Output Voltage: ME112, High Line

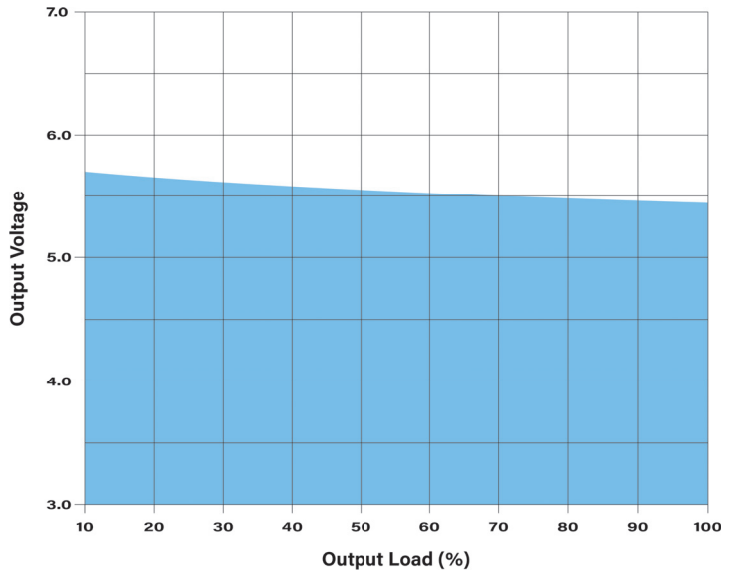


Output Load vs Output Voltage: ME112, Nom Line

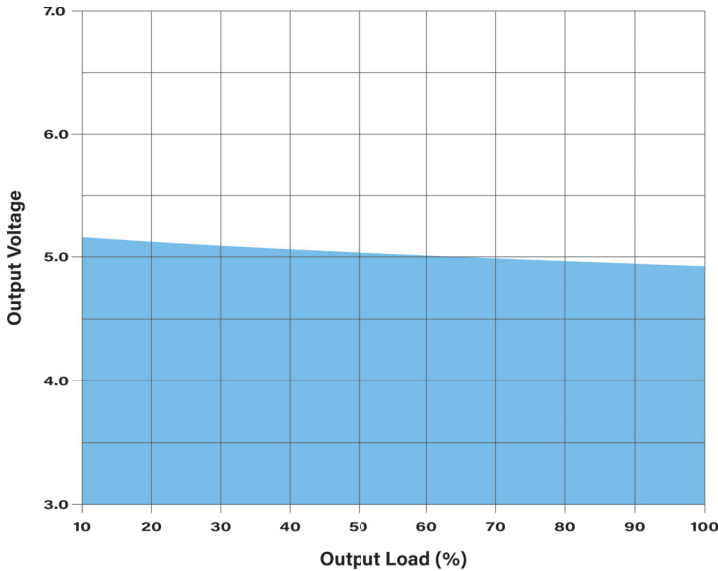


Output Load vs Output Voltage: ME112, Low Line

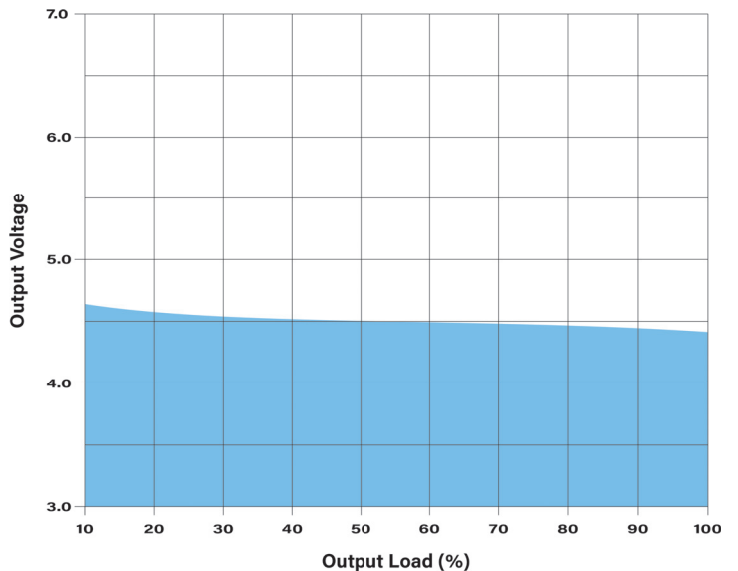


Output Load vs Output Voltage: ME124, High Line

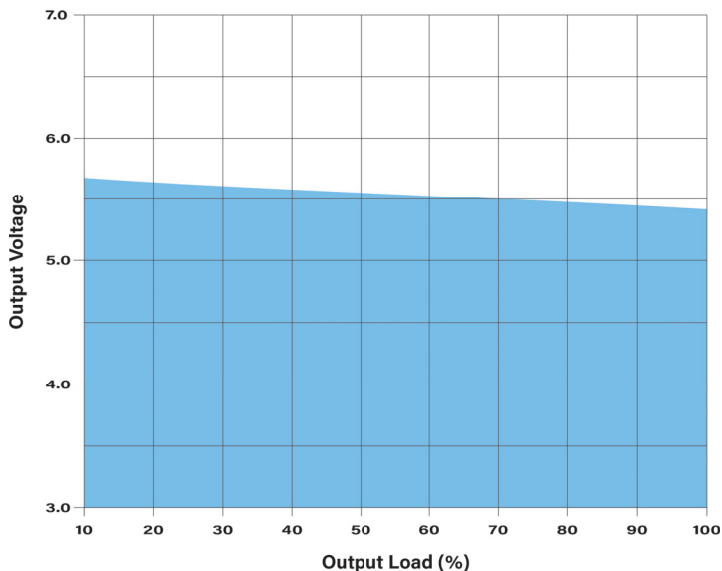


Output Load vs Output Voltage: ME124, Nom Line

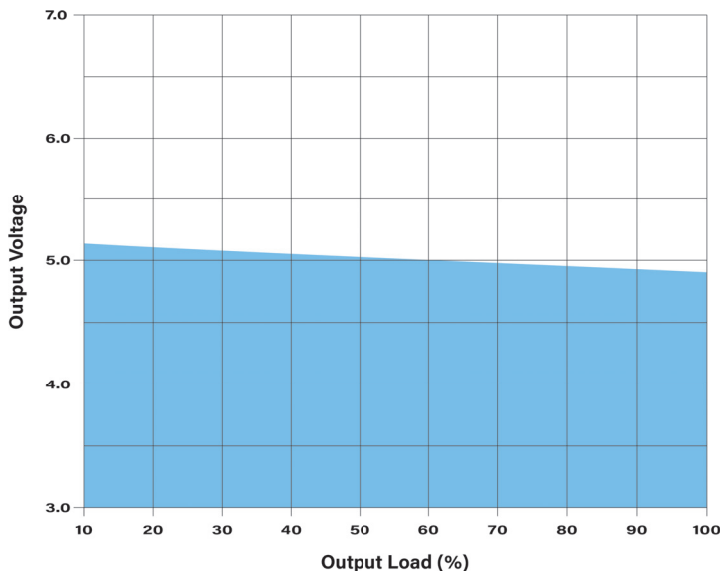

Output Load vs Output Voltage: ME124, Low Line

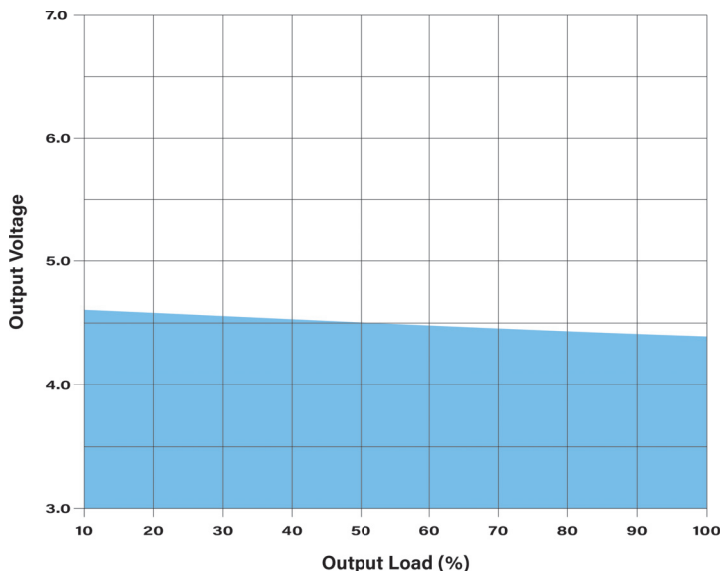

Temperature Derating Curve

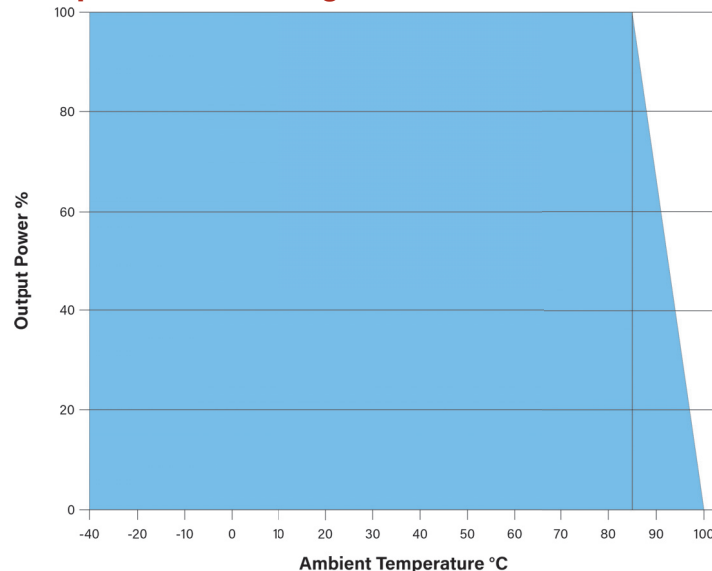

EMI/EMC Characteristics

Parameter		Standard	Criteria	Level
Radiated Emissions		EN 55032		Class B
Conducted Emissions	See Note 1	EN 55032		Class B
ESD		EN 61000-4-2	A	±6 kV Contact
RS		EN 61000-4-3	A	±8kV Air
EFT	See Note 2	EN 61000-4-4	A	20V/m
Surge	See Note 2	EN 61000-4-5	A	±2 kV
CS		EN 61000-4-6	A	±0.5 kV
PFMF		EN 61000-4-8	A	10 Vrms
			A	1A/m

Notes:

1. These converters will operate without external components. However, to meet the specified EMI limits, a simple external input filter is required. See page 5 for more information.
2. To meet the specified EN 61000-4-4 and EN 61000-4-5 limits, an external input capacitor must be connected across the input pins of the unit. See page 5 for more information.


Typical Connection



The diagram above illustrates a typical connection of the **ME100S**. For applications that do not require the circuit to meet EMI/EMC specifications, the capacitors C1 and C4 will reduce input/output ripple and improve the converter stability over time and temperature. The recommended component values are given in the table at right.

V _{IN}	C ₁	V _{OUT}	C ₄
3.3 VDC	5.0 μ F/25V	3.3 VDC	10 μ F/16V
5 VDC	5.0 μ F/25V	5 VDC	10 μ F/16V
12 VDC	7.5 μ F/25V	7.2 VDC	10 μ F/16V
15 VDC	7.5 μ F/50V	9 VDC	10 μ F/16V
24 VDC	10 μ F/50V	12 VDC	10 μ F/25V
		15 VDC	10 μ F/25V
		18 VDC	10 μ F/35V
		24 VDC	10 μ F/50V

EMI Connection

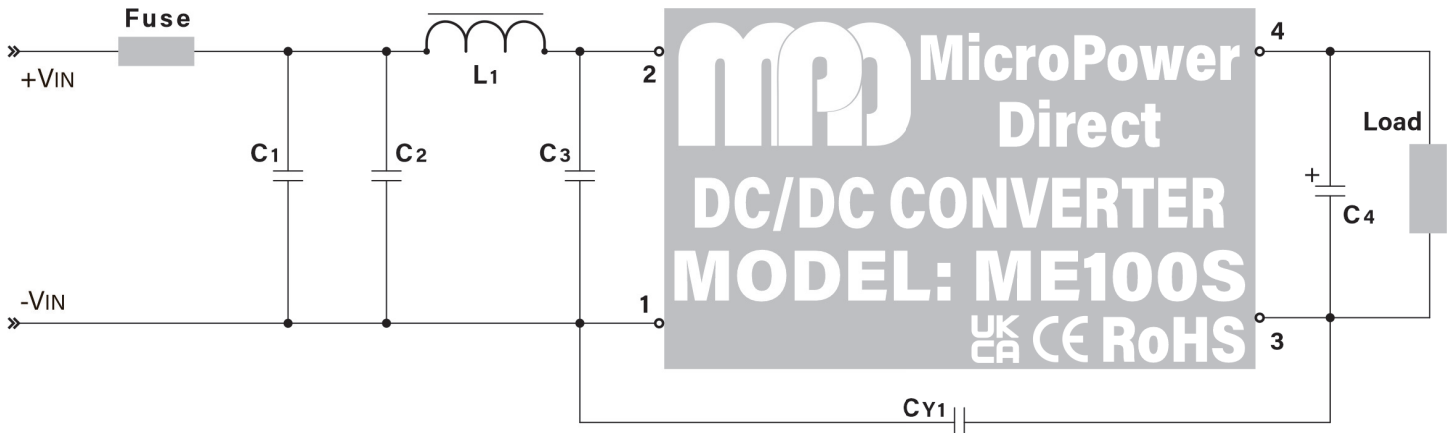

The diagram above illustrates a connection of the **ME100S** for an application that requires compliance to EMI/EMC standards EN 55032 and EN 61000-4 (as specified on page 4). Some notes on these components are:


1. An external fuse is recommended to protect the unit in the event a fault occurs on the input line. A recommended value is given in the model selection table on page 2.
2. The output filtering capacitor (C4) is a high frequency, low resistance electrolytic capacitor. Care must be taken in choosing this capacitor not to exceed the capacitive

load specification for the unit. Voltage derating of capacitors should be 80% or above.

3. Recommended component values for all external input components are given in the table below.
4. In many applications, simply adding input/output capacitors will enhance the input surge protection & and reduce output ripple sufficiently. In this case, capacitors could be connected as shown in the typical connection at the top of the page, without the other filter components.

Suggested component values are:

V _{IN}	C ₁	C ₂	L ₁	C ₃	CY ₁
3.3 VDC	Nippon Chemi-Con KY Series 470 μ F/100V	MLCC 2.2 μ F/100V	18 μ H	Not Required	Not Required
5 VDC					
12 VDC					
15 VDC					
24 VDC				MLCC 2.2 μ F/100V	MLCC 470 pF/3 kV

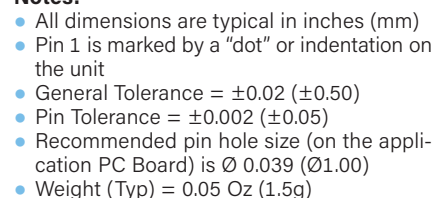

CME CompuMess
Elektronik
Power mit System