


# G100ER Series

## Low Cost, 1W DIP Tightly Regulated DC/DC Converters

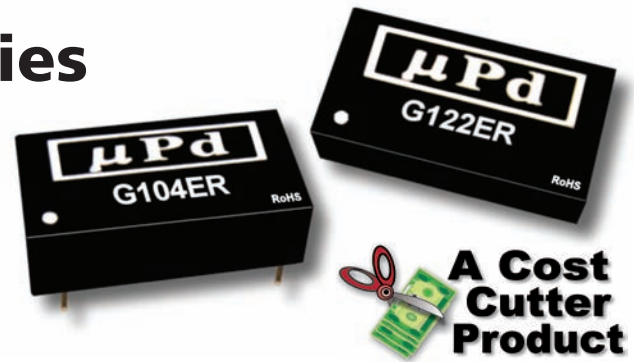

### Key Features:

- 1W Output Power
- Tightly Regulated
- Single & Dual Outputs
- Compact "MiniDip" Case
- 1,000 VDC Isolation
- >3.5 MHour MTBF
- 24 Standard Models
- Industry Standard Pin-Out
- Short Circuit Protected



MicroPower Direct



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

#### Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.75	5.0	5.25	VDC
	12 VDC Input	11.4	12.0	12.6	
	24 VDC Input	22.8	24.0	25.2	
Input Filter	Internal Capacitor				
Reverse Polarity Input Current				0.3	A

#### Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy				±3.0	%
Line Regulation	For Vin Min to Max			±0.25	%
Load Regulation (Note 1)	For Iout = 10% to 100%			±1.0	%
Ripple (20 MHz) (Note 3)			10	20	mV P - P
Noise (20 MHz)			50	75	mV P - P
Output Power Protection		120			%
Temperature Coefficient				±0.03	%/°C
Output Short Circuit	Continuous				

#### General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		60		pF
Switching Frequency			100		kHz

#### Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Operating Temperature Range	Case	-40		+90	°C
Storage Temperature Range		-55		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

#### Physical

Case Size (Single Output)	0.787 x 0.39 x 0.26 Inches (20.0 x 10.0 x 6.5 mm)
Case Material	Non-Conductive Black Plastic (UL94-V0)
Weight	0.07 Oz (2.1g)

#### Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	3.5			MHours

#### Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		9.0	VDC
	12 VDC Input	-0.7		18.0	
	24 VDC Input	-0.7		30.0	
Lead Temperature	1.5 mm From Case For 10 Sec			300	°C
Internal Power Dissipation	All Models			450	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

# Model Selection Guide

Model Number	Input				Output			Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)		
	Nominal	Range	Full-Load	No-Load					
G101ER	5	4.75 - 5.25	294	30	5.0	150.0	15.0	68	500
G102ER	5	4.75 - 5.25	286	30	9.0	111.0	12.0	70	500
G103ER	5	4.75 - 5.25	282	30	12.0	83.0	9.0	71	500
G104ER	5	4.75 - 5.25	273	30	15.0	67.0	7.0	73	500
G111ER	12	11.4 - 12.6	122	15	5.0	150.0	15.0	68	200
G112ER	12	11.4 - 12.6	116	15	9.0	111.0	12.0	72	200
G113ER	12	11.4 - 12.6	119	15	12.0	83.0	9.0	70	200
G114ER	12	11.4 - 12.6	113	15	15.0	67.0	7.0	74	200
G121ER	24	22.8 - 25.2	61	8	5.0	150.0	15.0	68	100
G122ER	24	22.8 - 25.2	61	8	9.0	111.0	12.0	68	100
G123ER	24	22.8 - 25.2	57	8	12.0	83.0	9.0	73	100
G124ER	24	22.8 - 25.2	55	8	15.0	67.0	7.0	75	100


**Notes:**

- Output load regulation is specified for a load change of 10% to 100%.
- These units should not be operated with a load under 10% of full load. Operation at no-load may cause damage to the unit.
- These converters will operate without external components. However, when measuring output ripple, it is recommended that an external ceramic capacitor be placed from the +Vout pin to the -Vout pin. An input capacitor will enhance stability over temperature and input line variations. Recommended capacitor values are given in the table below. For applications requiring very low output noise levels, a simple LC filter should be effective.


Vin	Input Capacitor	Vout	Output Capacitor	
			Single	Dual
5 VDC	4.7 $\mu$ F	5 VDC	10.0 $\mu$ F	4.7 $\mu$ F
12 VDC	2.2 $\mu$ F	9 VDC	4.7 $\mu$ F	2.2 $\mu$ F
24 VDC	1.0 $\mu$ F	12 VDC	2.2 $\mu$ F	1.0 $\mu$ F
		15 VDC	1.0 $\mu$ F	0.47 $\mu$ F

- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

## Derating Curve

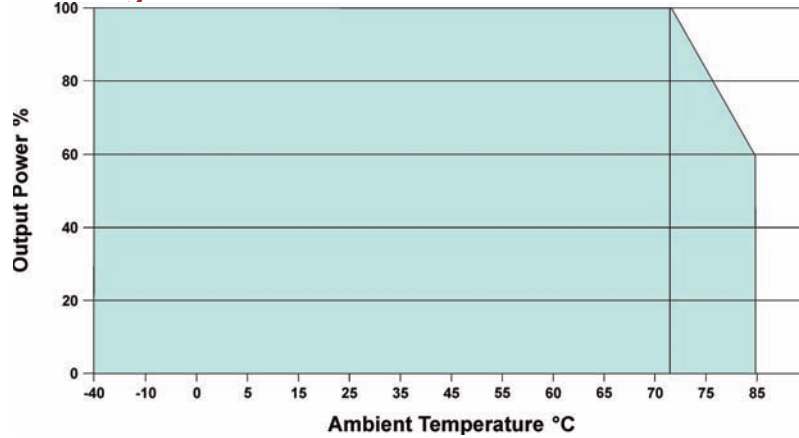

## Mechanical Dimensions (Single Output)

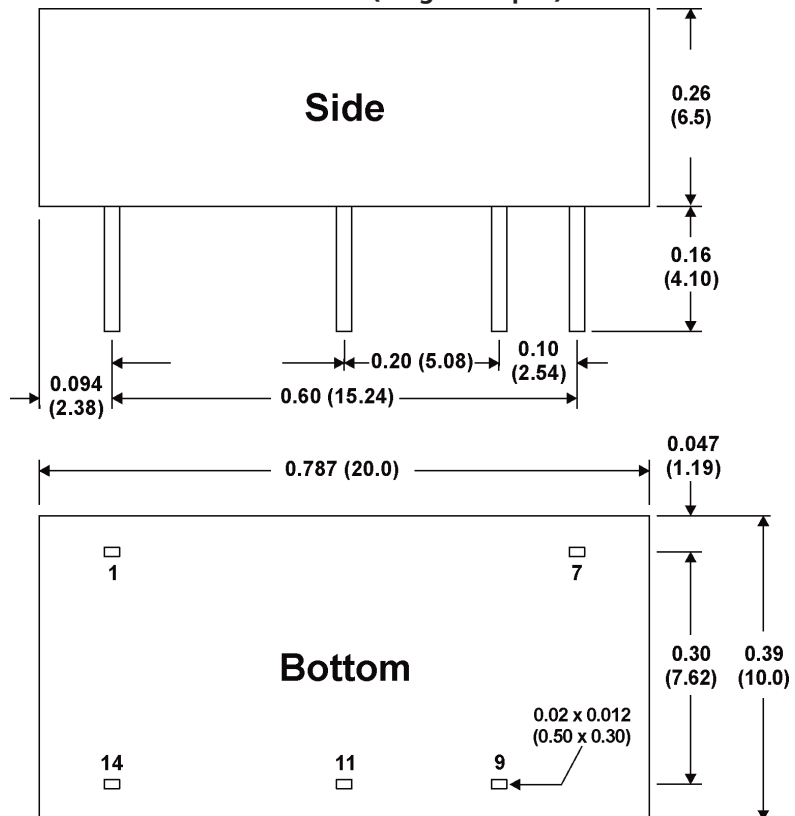

## Pin Connections

Pin	Function
1	-Vin
7	NC
9	+Vout
11	-Vout
14	+Vin

NC = No Connection

**Notes:**

- All dimensions are typical in inches (mm)
- Tolerance x.xx =  $\pm 0.01$  ( $\pm 0.25$ )
- Pin 1 is marked by a "dot" or indentation on the top of the unit



# MicroPower Direct

**CME**  
COMPUMESS ELEKTRONIK

CompuMess Elektronik GmbH • Lise-Meitner-Str. 1 • D-85716 Unterschleißheim  
 Telefon (089) 32 15 01 - 0 • Telefax (089) 32 15 01 - 11  
 info@compumess.de • www.compumess.de • www.netzteile.de