




MicroPower Direct

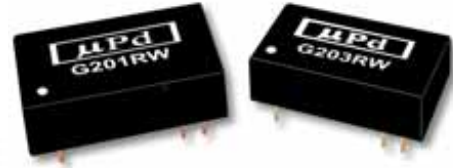

Compact MiniDIP, 2W
Wide Input Range
DC/DC Converters
G200RW Series

Key Features

- Miniature DIP Package
- 2:1 Input Range
- 1.0 MH MTBF
- 2W Output Power
- Single & Dual Outputs
- Low Cost

Electrical Specifications

Specifications typical @ +25°C with nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Start Voltage	5 VDC Input	3.5	4.0	4.5	VDC
	12 VDC Input	4.5	7.0	9.0	
	24 VDC Input	8.0	12.0	18.0	
	48 VDC Input	16.0	24.0	36.0	
Input Filter	π (Pi) Filter				
Reverse Polarity Input Current				1.0	A
Short Circuit Input Power				1,500	mW

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±1.0	±2.0	%
Output Voltage Balance			±1.0	±2.0	%
Line Regulation	V _{in} = Min to Max		±0.3	±0.5	%
Load Regulation	I _{out} = 25% to 100%		±0.5	±0.75	%
Ripple & Noise (20 MHz) (Note 2)			30	50	mV P - P
Ripple & Noise (20 MHz)	Over Line, Load & Temp.			75	mV P - P
Ripple & Noise (20 MHz)				15	mV rms
Output Power Protection		120			%
Transient Response Time (Note 3)	50% Load Step Change		100	300	µSec
Transient Response Deviation			±3.0	±5.0	%
Temperature Coefficient			±0.01	±0.02	%/°C
Output Short Circuit	Continuous				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,500			VDC
Isolation Test Voltage	Flash Tested For 1 Sec	1,650			VDC
Isolation Resistance	1,000 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		250	420	pF
Switching Frequency			300		kHz

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+65	°C
Operating Temperature Range	Case	-40	+25	+90	°C
Storage Temperature Range		-40		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	0.94 x 0.54 x 0.30 Inches (23.8 x 13.7 x 7.62 mm)
Case Material	Non-Conductive Black Plastic
Weight	0.18 Oz (5.1g)

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1,000			kHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		11.0	VDC
	12 VDC Input	-0.7		25.0	
	24 VDC Input	-0.7		50.0	
	48 VDC Input	-0.7		100.0	
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C
Internal Power Dissipation	All Models			1,800	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.


Model Selection Guide

Model Number	Input				Output			Reflected Ripple Current (mA)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
G201RW	5	4.5 - 9.0	471	40	3.3	500.0	125.0	100	70	1,000
G202RW	5	4.5 - 9.0	548	40	5.0	400.0	100.0	100	73	1,000
G203RW	5	4.5 - 9.0	534	40	12.0	1670	42.0	100	75	1,000
G204RW	5	4.5 - 9.0	582	40	15.0	134.0	33.0	100	73	1,000
G205RW	5	4.5 - 9.0	667	40	±5.0	±200.0	±50.0	100	64	1,000
G206RW	5	4.5 - 9.0	615	40	±12.0	±83.0	±21.0	100	69	1,000
G207RW	5	4.5 - 9.0	598	40	±15.0	±67.0	±17.0	100	71	1,000
G211RW	12	9.0 - 18.0	184	20	3.3	500.0	125.0	25	73	500
G212RW	12	9.0 - 18.0	217	20	5.0	400.0	100.0	25	77	500
G213RW	12	9.0 - 18.0	209	20	12.0	1670	42.0	25	80	500
G214RW	12	9.0 - 18.0	220	20	15.0	134.0	33.0	25	80	500
G215RW	12	9.0 - 18.0	242	20	±5.0	±200.0	±50.0	25	73	500
G216RW	12	9.0 - 18.0	224	20	±12.0	±83.0	±21.0	25	78	500
G217RW	12	9.0 - 18.0	226	20	±15.0	±67.0	±17.0	25	78	500
G221RW	24	18.0 - 36.0	96	10	3.3	500.0	125.0	15	72	250
G222RW	24	18.0 - 36.0	109	10	5.0	400.0	100.0	15	77	250
G223RW	24	18.0 - 36.0	109	10	12.0	1670	42.0	15	80	250
G224RW	24	18.0 - 36.0	108	10	15.0	134.0	33.0	15	81	250
G225RW	24	18.0 - 36.0	119	10	±5.0	±200.0	±50.0	15	74	250
G226RW	24	18.0 - 36.0	112	10	±12.0	±83.0	±21.0	15	78	250
G227RW	24	18.0 - 36.0	110	10	±15.0	±67.0	±17.0	15	80	250
G231RW	48	36.0 - 72.0	49	8	3.3	500.0	125.0	10	71	120
G232RW	48	36.0 - 72.0	57	8	5.0	400.0	100.0	10	73	120
G233RW	48	36.0 - 72.0	53	8	12.0	1670	42.0	10	79	120
G234RW	48	36.0 - 72.0	55	8	15.0	134.0	33.0	10	79	120
G235RW	48	36.0 - 72.0	62	8	±5.0	±200.0	±50.0	10	71	120
G236RW	48	36.0 - 72.0	57	8	±12.0	±83.0	±21.0	10	77	120
G237RW	48	36.0 - 72.0	57	8	±15.0	±67.0	±17.0	10	77	120


Notes:

- Dual output units may be connected to provide a 10V, 24V or 30 VDC output. To do this, connect the load across the positive (+Vout) and negative (-Vout) outputs and float the output common.
- When measuring output ripple, it is recommended that an external 0.47 µF ceramic capacitor be placed from the +Vout pin to the -Vout pin.
- Transient recovery is measured to within a 1% error band for a load step change of 50% to 100%.
- Operation at no-load will not damage these units. However, they may not meet all specifications. To maintain specified operation, the minimum output loading given in the table above must be maintained.

Derating Curve

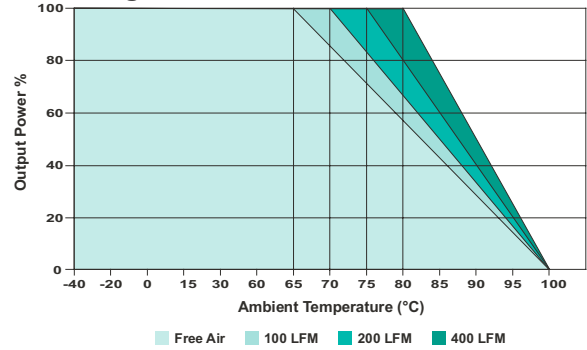

Mechanical Dimensions

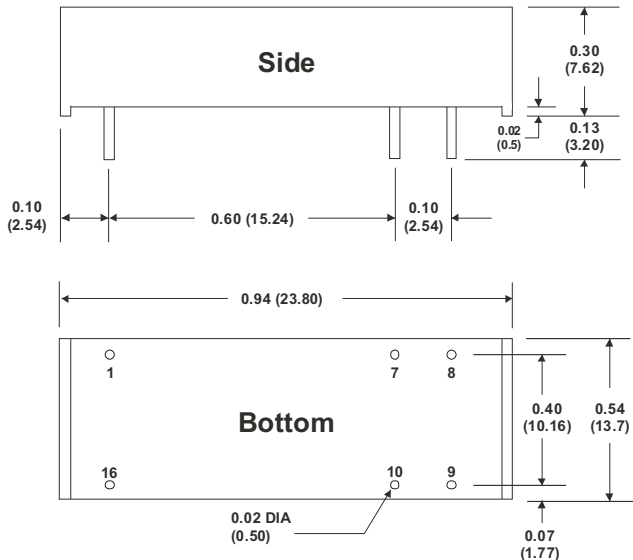

Pin Connections

Pin	Single	Dual
1	-Vin	-Vin
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

NC = No Connection

Capacitive Load

Output (VDC)	µF Max
3.3	2,200
5.0	1,000
12.0	170
15.0	110
±5.0	470
±12.0	100
±15.0	47

Note: For dual output units, Cap load is given for each output.

Notes: All dimensions are typical in inches (mm)

Tolerance x.xx = ±0.01 (±0.25)

Pin 1 is marked by a "dot" or indentation on the top of the unit

